

### Rolling skids

Recommended for distances from 10 m


#### APPLICATION AREA

Rolling skids RS40/150 for pipe diameters Ø 150 - 200 mm  
Rolling skids RS40/200 for pipe diameters Ø 200 - 300 mm

#### KEY FEATURES

- Optimized view of the pipe section
- Less pushing resistance with the fully rubberized wheels



Model		No.
<b>For camera heads Ø 40 mm:</b>		
Rolling skids Ø 150 mm	700	<b>69118</b>
Rolling skids Ø 200 mm	700	<b>69119</b>

### Brush attachments


To improve the overview in pipes from Ø 100 – 200 mm

#### APPLICATION AREA

Brush attachment Ø 100 for use in pipe Ø 100 - 150 mm  
Brush attachment Ø 150 for use in pipe Ø 150 - 200 mm


#### KEY FEATURES

- Optimized view of the pipe section through centring in the pipe
- Dirt will not accumulate in front of the lens
- Good curveability with the brush flexibility

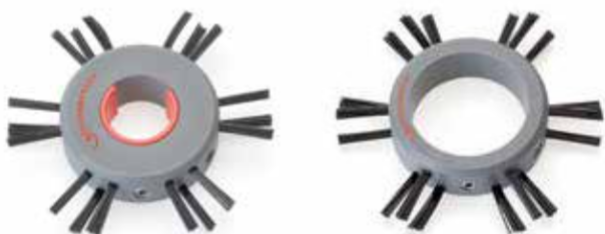

Brush attachment spiral feather (rear)    Brush attachment camera head (front)

\*Use with guidance ball No. 69112 / 1500000817

Model		No.
Brush attachment Ø 100*	200	<b>69113</b>
Brush attachment Ø 150*	300	<b>69117</b>

### Guidance ball ROCAM 4 Plus


For centring of the camera head in pipes for a better overview and illumination

#### APPLICATION AREA

Guidance ball for pipe diameters Ø 70 - 150 mm  
Guidance ball with brush attachment for pipe diameters Ø 70 - 200 mm


#### KEY FEATURES

- Optimized view of the pipe section through centring in the pipe
- Dirt will not accumulate in front of the lens

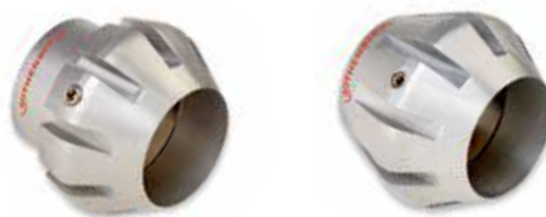

No. 69112 / 1500000817

No. 69111 / 1500000120

Model		No.
<b>For camera heads Ø 30 mm:</b>		
Guidance ball for Ø 150 mm	200	<b>1500000120</b>
Guidance ball for brush attachments	200	<b>1500000817</b>
<b>For camera heads ø 40 mm:</b>		
Guidance ball for ø 200 mm	200	<b>69111</b>
Guidance ball for brush attachments	200	<b>69112</b>

### Battery pack system CAS, mains adaptor and charger

#### KEY FEATURES

- Extend the mobile operation spare battery
- No unintentional release of the battery, battery lock with click mechanism
- External battery charger, independent charging of the battery, higher mobility

#### TECHNICAL DATA

Battery: 18 V / 4.0 Ah, Li-Ionen



Model	No.
RO BP18/4, 4.0 Ah 18V Li-Power battery	<b>1000001653</b>
RO BC14/36, battery charger, 230 V, EU	<b>1000001654</b>
ROCAM 4 Plus adaptor, 230 V, EU	<b>1000002085</b>

<sup>2)</sup> More information at [cordless-alliance-system.com](http://cordless-alliance-system.com)